

PERFORMA®

Adagio® VOC Compliant







LEED® v4


- MR: Environmental Product Declarations (EPDs)
- MR: Sourcing Raw Materials
- MR: Material Ingredients (HPDs)
- IEQ: Daylight
- IEQ: Low-Emitting Materials
- IEQ: Prereq. Min. Acoustic Performance (Schools)
- IEQ: Acoustic Performance
- MR: PBT Source Reduction (Healthcare)
- IEQ: Interior Lighting
- EA: Prereq. Min. Energy Performance
- EA: Optimize Energy Performance
- Recycled Content Pre: 17% | Post: 14%

TOOLS

Visit CertainTeed.com/Ceilings Download HPDs and EPDs LEED® Information / BIM Objects 3-Part Specs / Data Pages



Recycled Content

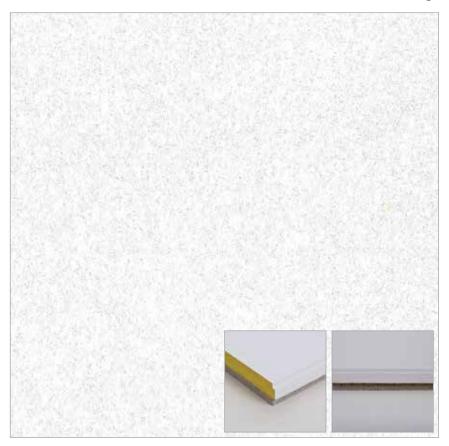

The Adagio® line provides a white, clean, monolithic ceiling visual. Design with other products in the Symphony® f line for acoustical solutions.

FEATURES & BENEFITS

- Unique composite panel with optimal sound absorption and attenuation
- Encapsulated fiberglass layer provides exceptional sound absorption and acoustic comfort (0.90 NRC)
- Offers highly effective sound containment (CAC 36-38)
- Can enhance space privacy compliance (assists with HIPAA requirements in healthcare)
- Seamless integration with Symphony f for targeted acoustic performance
- Certified VOC compliant
- Exceeds FGI guidelines for cleanability and acoustic performance

APPLICATIONS

- Offices Requiring Privacy
- Medical Treatment / Exam Rooms
- Conference Rooms
- Music Rooms
- Other Commercial Buildings / Space Applications

AVAILABLE EDGE DETAILS













Adagio® Narrow Reveal (1662F-IOF-1)

ATT		21 IT	EC
\sim 1 1	TIL	3 0 i	_3

ATTRIBUTES			*	<u></u>	1				++.	*	LOW	(3)
	DIMENSIONS (INCHES)	EDGE DETAIL	NRC	CAC	SAG RESISTANT	MOLD RESISTANT	LR	WASHABLE	WASHABLE WITH SANITIZING CHEMICALS	FIRE CLASS (ASTM E1264)	EMISSION COMPLIANT	RECYCLED CONTENT
ADAGIO®												
1662-IOF-1	24 x 24 x 1-1/2	Trim	0.90	36	Yes	BioShield	0.90	Yes	Yes	Class A	Certified	31%
1662B-IOF-1	24 × 24 × 1-1/2	Reveal	0.90	36	Yes	BioShield	0.90	Yes	Yes	Class A	Certified	31%
1662F-IOF-1	24 × 24 × 1-1/2	Narrow Reveal	0.90	36	Yes	BioShield	0.90	Yes	Yes	Class A	Certified	31%
1660-IOF-1	24 × 48 × 1-1/2	Trim	0.90	38	Yes	BioShield	0.90	Yes	Yes	Class A	Certified	31%
1660B-IOF-1	24 × 48 × 1-1/2	Reveal	0.90	38	Yes	BioShield	0.90	Yes	Yes	Class A	Certified	31%
1660F-IOF-1	24 x 48 x 1-1/2	Narrow Reveal	0.90	38	Yes	BioShield	0.90	Yes	Yes	Class A	Certified	31%

Also available in metric. Additional sizes available upon request.

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

PHYSICAL DATA

MATERIAL

ASTM E1264 CLASSIFICATION

Type XX, Pattern E

FIRE CLASS (ASTM E1264)
Tested according to ASTM E84 & CAN S102 Flame Spread: 25 or less Smoke Developed: 50 or less

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

MOLD/MILDEW RESISTANCE

BioShield® treatment included for added mold and mildew resistance.

MAINTENANCE

IOF Finish: Clean panel using a sponge/cloth dampened with water and mild liquid detergent solution. Do not soak panel. Cleanable with sanitizing chemicals.

WARRANTY

10-year 104/90 Limited Warranty

