



CertainTeed Ceilings

Gyptone® Base 31™, Line 4™, Point 11™, Quattro 20™ Installation Instructions

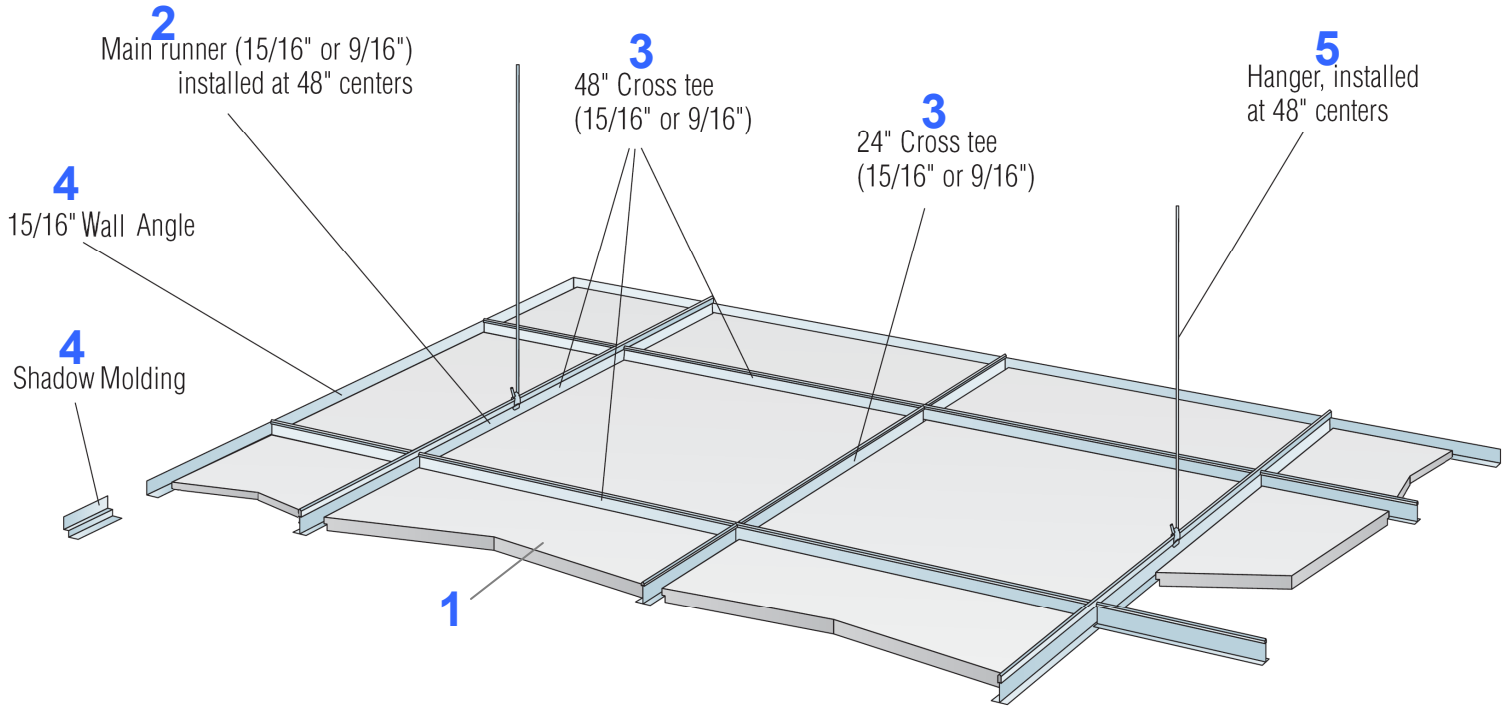

Components:

1. Gyptone Panels (2'x2')
2. CertainTeed 15/16" Classic Main Runners (for Trim Edge)
(or CertainTeed 9/16" Elite Narrow Main Runners for Narrow Reveal)
3. 15/16" Classic Cross Tees
(or 9/16" Elite Narrow Cross tees)
4. CertainTeed Ceilings 15/16" or 9/16" Wall Angle
or Shadow Molding
5. 12 Gauge Hanger Wire

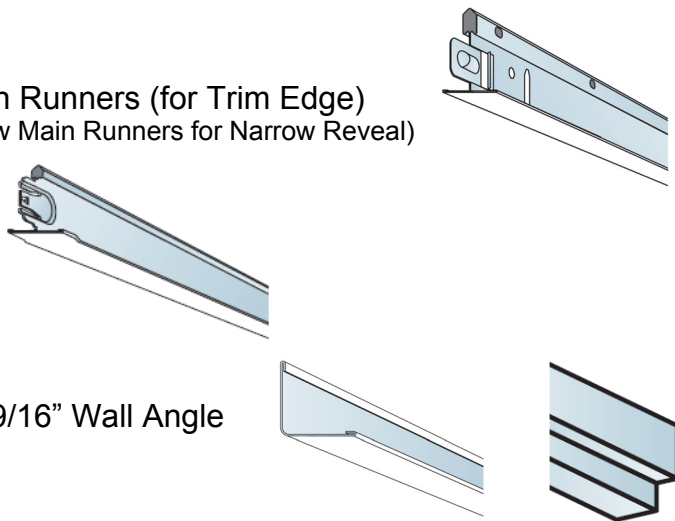


Wear clean white cotton gloves when handling Gyptone panels.

Pre-Installation: Please read *CertainTeed Ceiling's Pre-Installation Instructions* before you begin these installation instructions.

1. Installing Wall Angle


- a. To install Wall Angle choose a height at least 3" below joists, existing ceilings, ducts, pipes, or wiring, to ensure clearance and maneuverability required to install the panels (integration with diffusers and light fixtures may dictate a greater depth of system).
- b. Mark the desired height for the finished surface of the ceiling on all four walls (see Steps 2-3).
- c. Attach Wall Angle using appropriate fasteners.

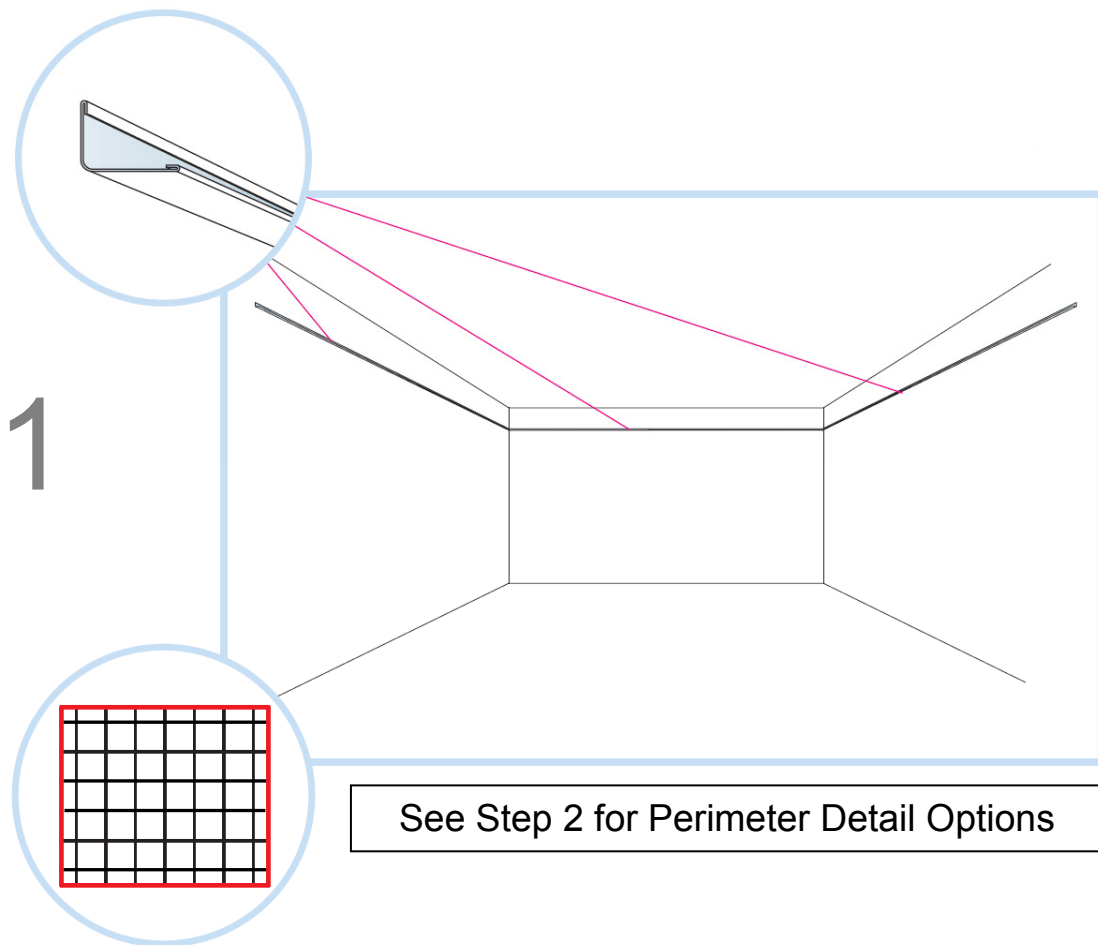

Gyptone Perimeter Detail Options

2¹


Cut Square edge panel

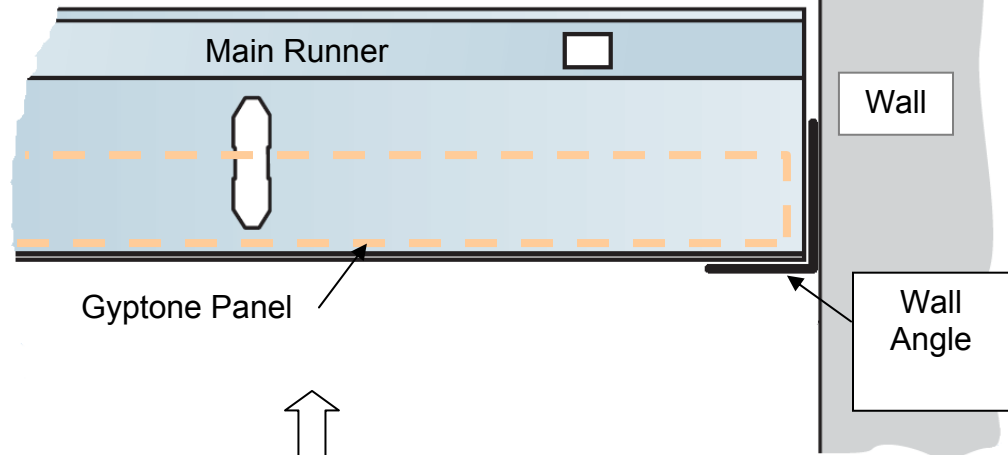

Note: This is the preferred option for perimeter treatment with Gyptone Panels. Regardless of whether the field panels are square edge or narrow reveal edge, the use of square edge Gyptone Base 31 panels is recommended for perimeter panels.

2²


Cut Square edge panel w/ Shadow Molding

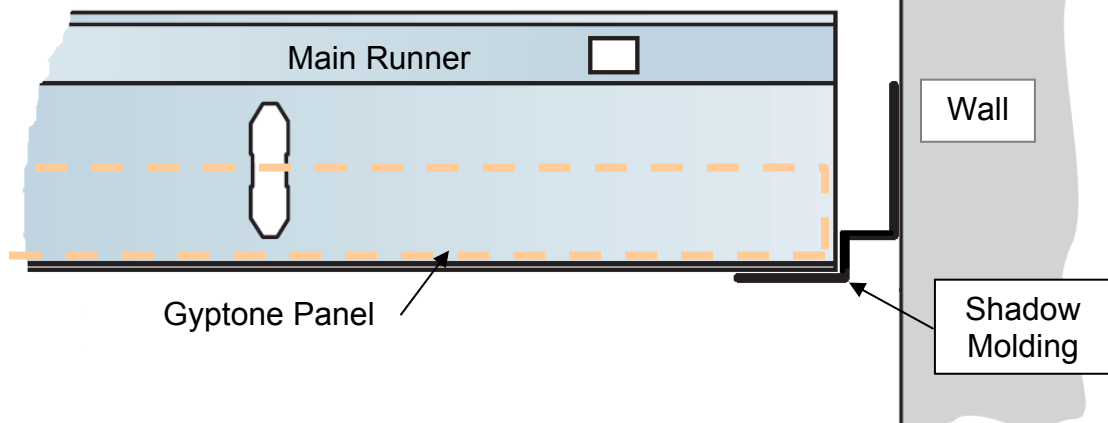

Gyptone Perimeter Detail Options Continued


2³

Cut Reveal edge panel

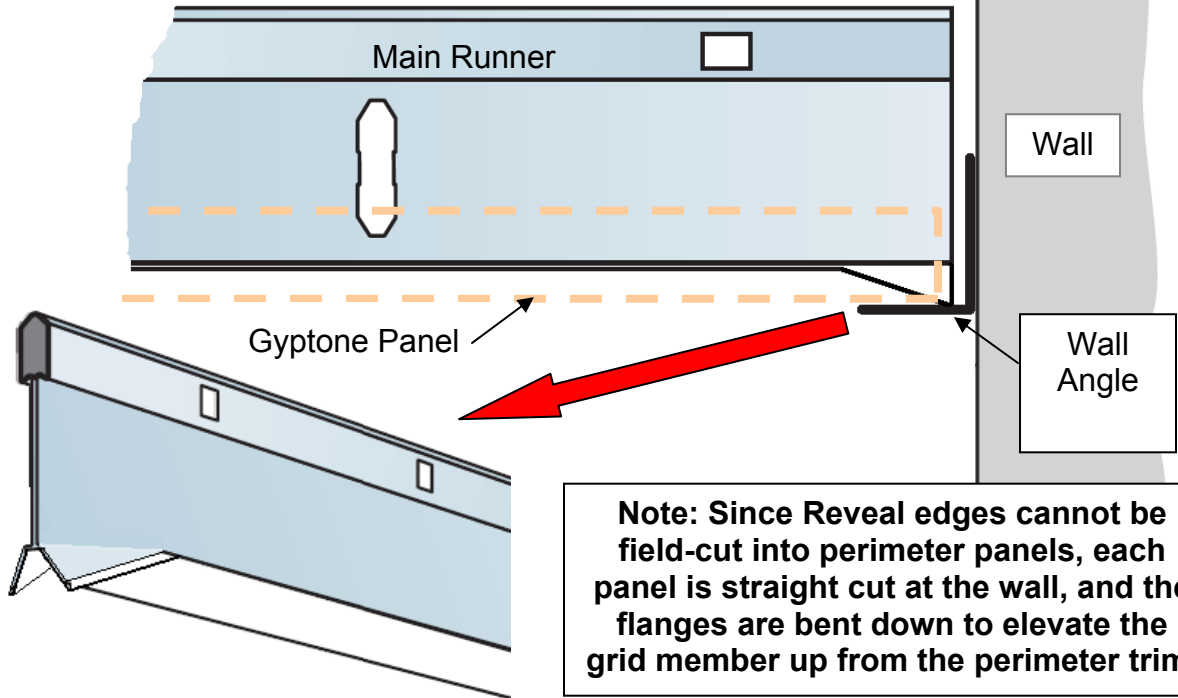

2⁴


Cut Reveal edge panel w/ Shadow Molding

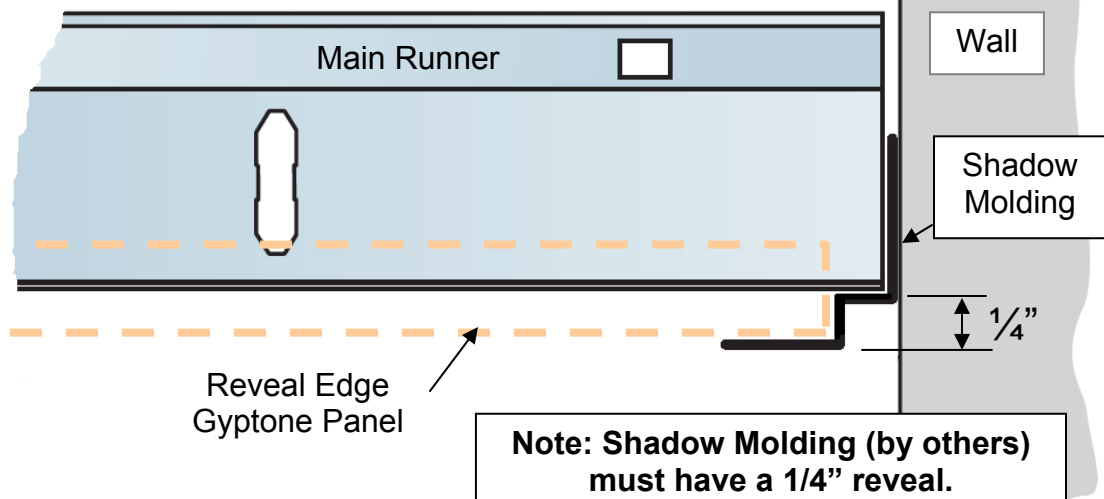

3. Install Hangers


- a. Mark lines for each of the main runners (4' on center).
- b. Pull a string line along the path that the first main runner will take. Attach the line directly below the wall molding.
- c. Hangers are placed every 48" along the main runners, at a max of 24" from the walls.

3

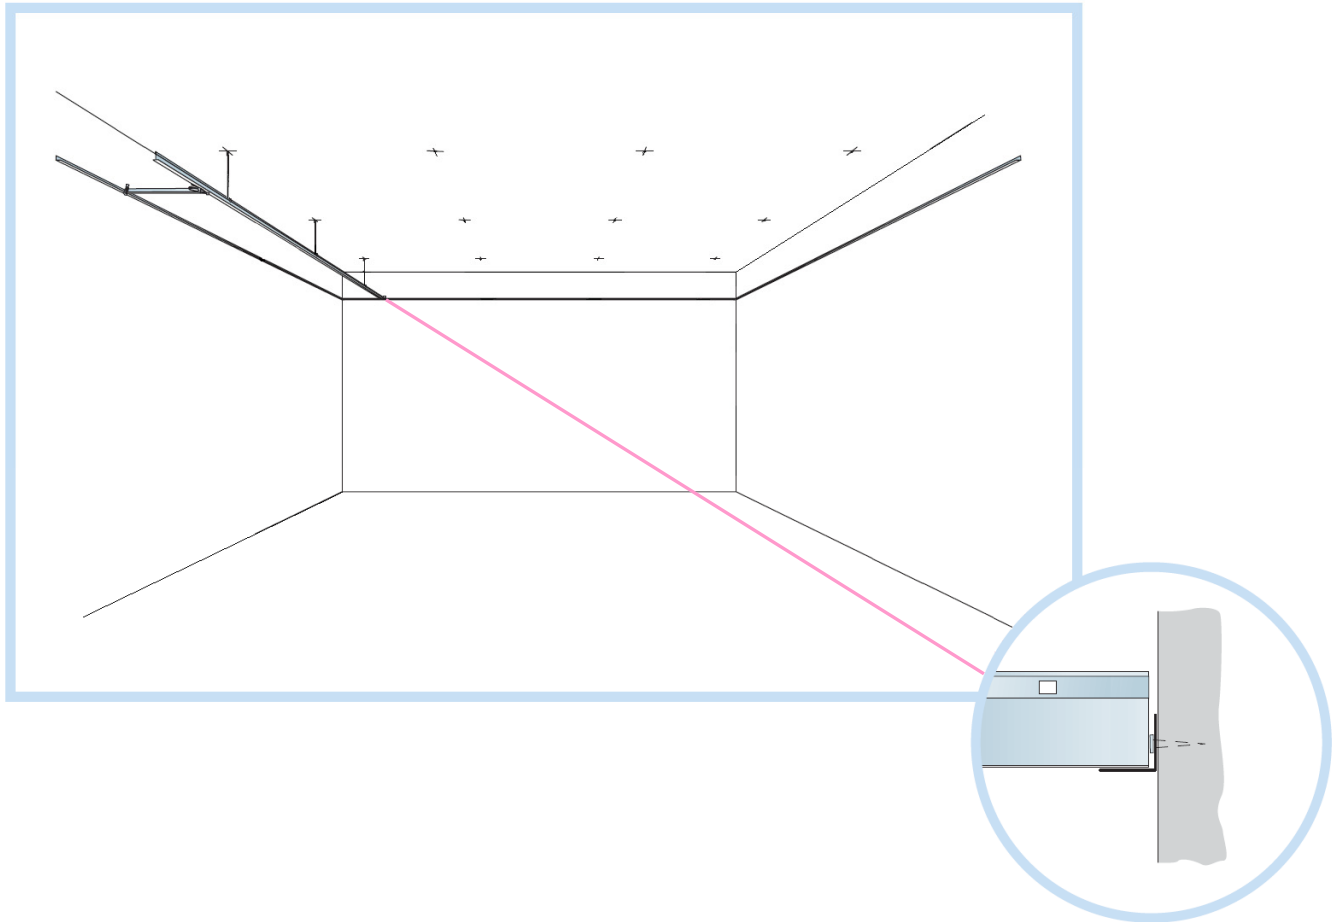


4. Install the main runners

- a. Install the first section of main runner, with cut edge sitting on the wall molding.
- b. Attach the main runner to wire.
- c. Repeat for the next sections of main runner.
- d. Make sure that all of the main runners are hanging at the same level

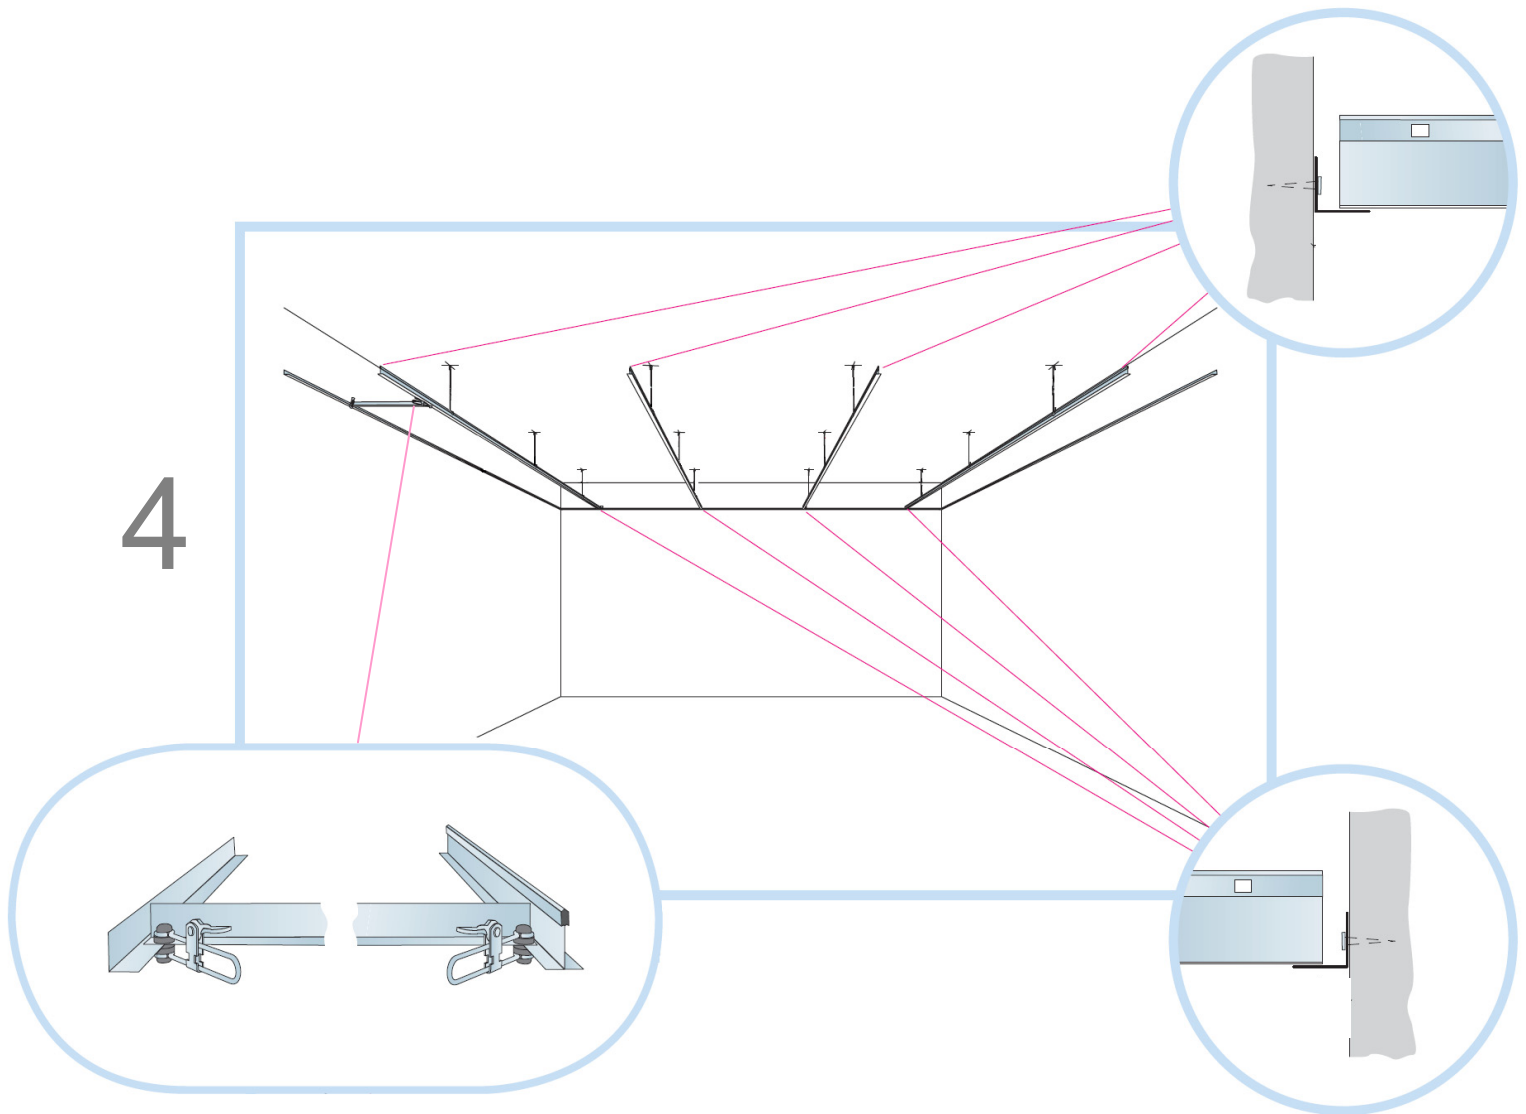


5. Install 4' Cross Tees and Border Tees

- a. Cut in border cross tees. Use a string line to make sure the main runners are straight.
- b. Install cross tees as needed.
- c. **Check to see if the suspension system is square. Make adjustments as needed.**

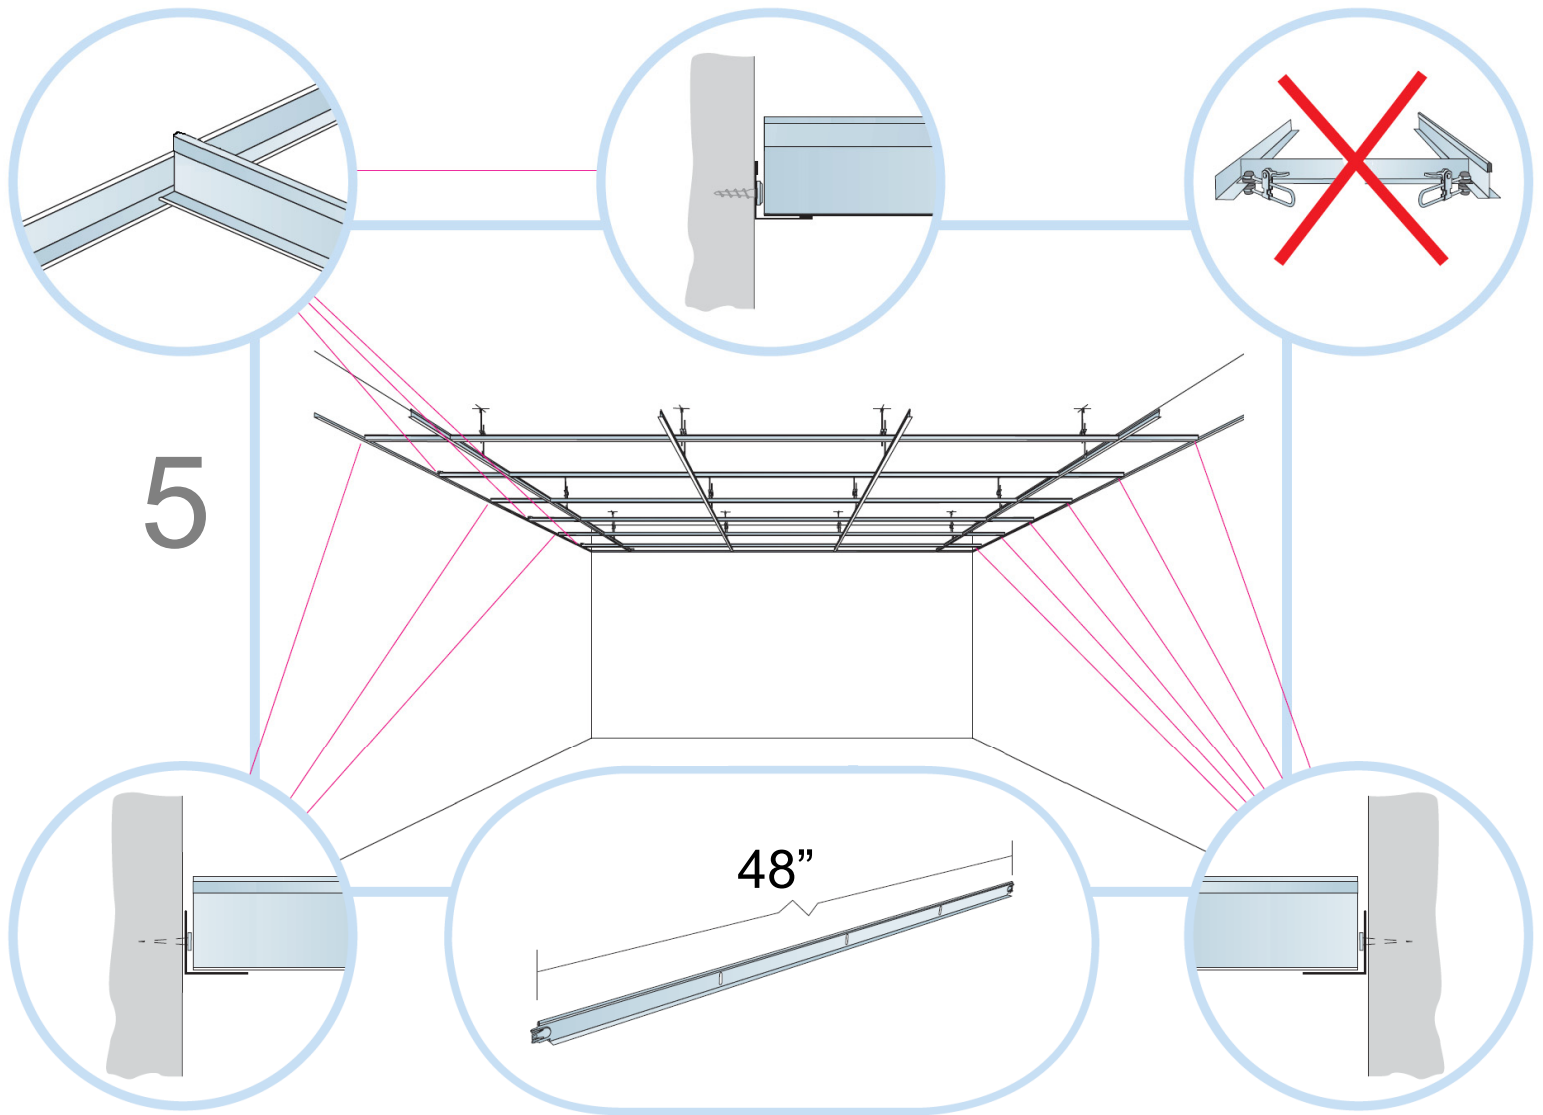

6. Install remaining 2' cross tees
 - a. Install remaining cross tees.
 - b. **Check to see if the suspension system is square. Make adjustments as needed.**

6

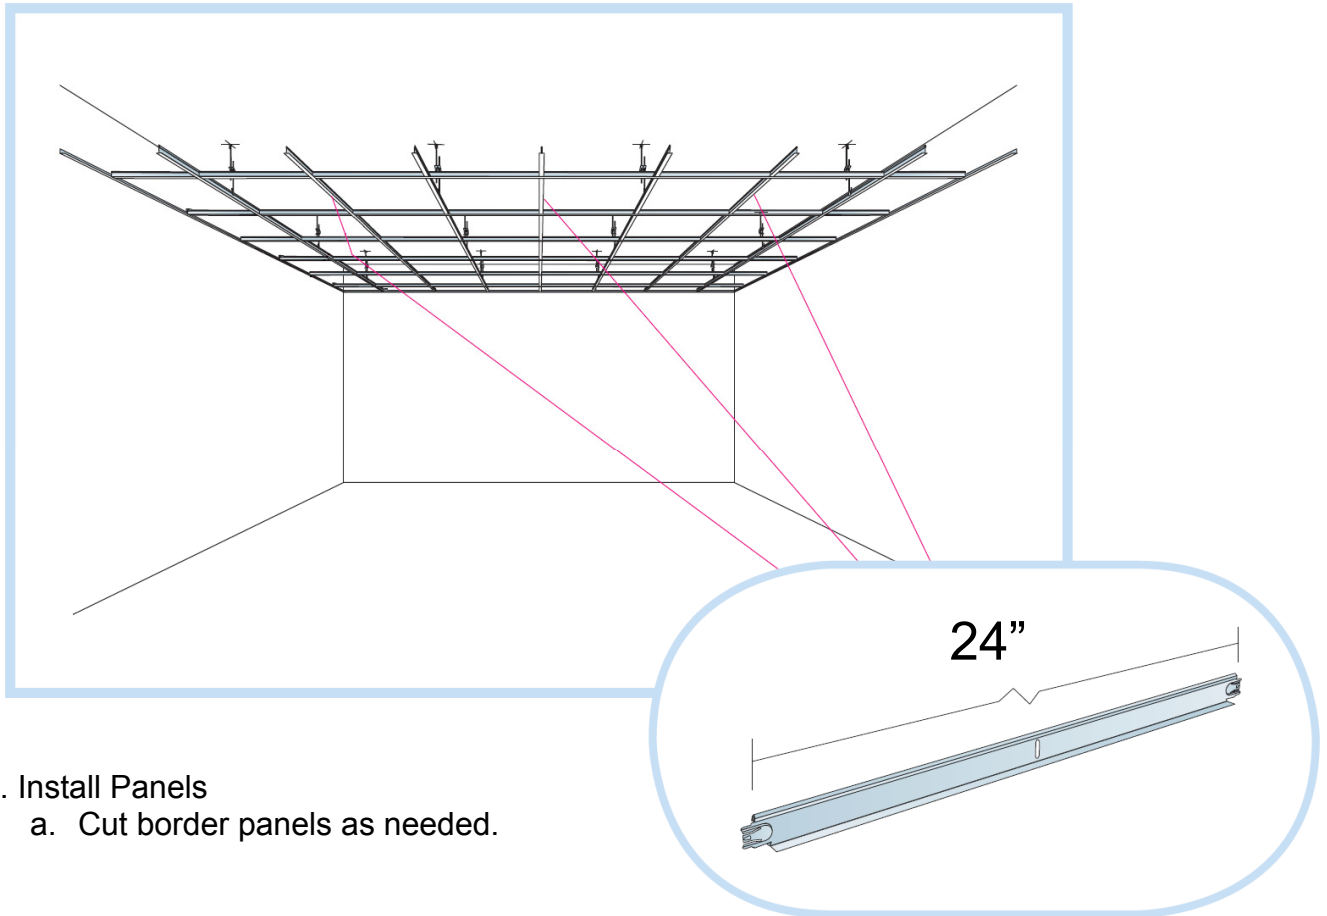

7. Install Panels
 - a. Cut border panels as needed.

FOR PRODUCT AND INSTALLATION QUESTIONS:

- Call 1-800-233-8990 (Monday-Thursday: 7:30 am-6:30 pm; Friday: 7:30 am-6:00 pm EST); English, Spanish and French speakers available. Or email ceilingtechnicalservices@certainteed.com.

ASK ABOUT ALL OF OUR OTHER CERTAINTEED® PRODUCTS AND SYSTEMS:

ROOFING • SIDING • TRIM • WINDOWS • DECKING • RAILING • FENCE
INSULATION • GYPSUM • CEILINGS • FOUNDATIONS • PIPE

CertainTeed Corporation
P.O. Box 860
Valley Forge, PA 19482

Professional: 800-233-8990
Consumer: 800-782-8777

www.certainteed.com <http://blog.certainteed.com>

© 05/10 CertainTeed Corporation
Code No. CTC-4808

