

# PERFORMA®

Cashmere®  
VOC Compliant

LOW  
VOC

\$\$\$

LEED® v4

LEED® v4

- MR: Environmental Product Declarations (EPDs)
- MR: Sourcing Raw Materials
- MR: Material Ingredients (HPDs)
- IEQ: Daylight
- IEQ: Low-Emitting Materials
- IEQ: Prereq. Min. Acoustic Performance (Schools)
- IEQ: Acoustic Performance
- MR: PBT Source Reduction (Healthcare)

● IEQ: Interior Lighting


● EA: Prereq. Min. Energy Performance

● EA: Optimize Energy Performance

● Recycled Content  
CLASS A Pre: **70%** Post: **0%**  
PROTECTONE® Pre: **45%** Post: **0%**

## TOOLS

Visit [CertainTeed.com/Ceilings](http://CertainTeed.com/Ceilings)  
Download HPDs and EPDs  
LEED® Information / BIM Objects  
3-Part Specs / Data Pages

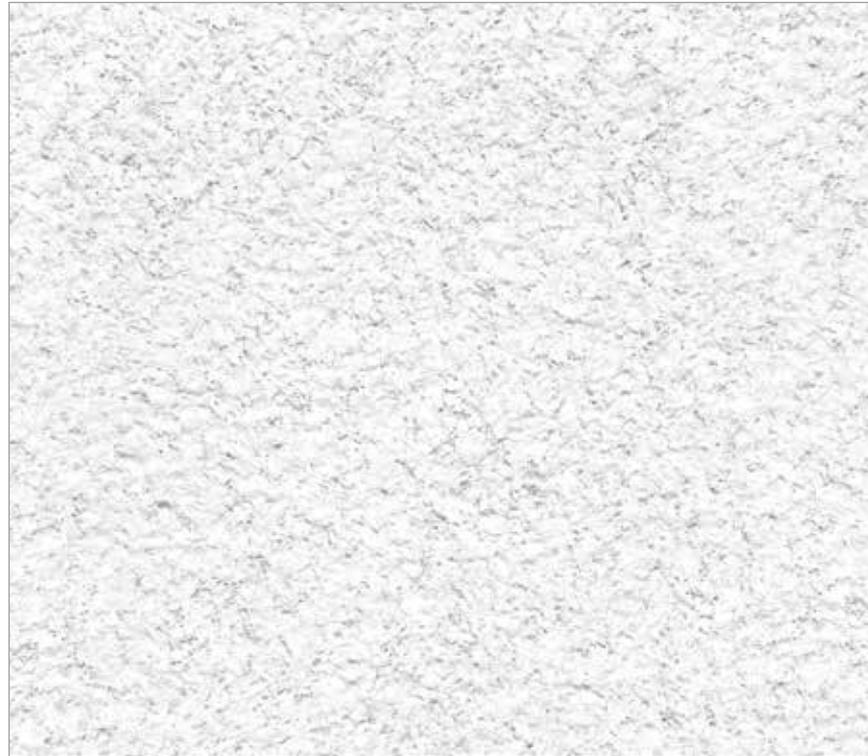

In addition to traditional white, you can make an impact with one of our 5 standard colors for item numbers CM-450, CM-454



Beige Breeze

Blondewood

Silver Lining

Wet Clay

White Wash

## FEATURES & BENEFITS

- Upscale appearance
- Finely textured
- Available in fire-rated (Protectone®) versions
- Third-party verified Environmental Product Declaration (EPD) available for this product
- Health Product Declaration (HPD) available for this product

## APPLICATIONS

- Offices
- Healthcare Areas
- Retail / Department Stores
- Hospitality Areas
- Other Commercial Buildings / Space Applications



Carbon Footprint Reduction  
Rapidly Renewable Resource Content  
Recycled Content



EPD Available




HPD Available

## AVAILABLE EDGE DETAILS



Color-coordinated suspension systems available

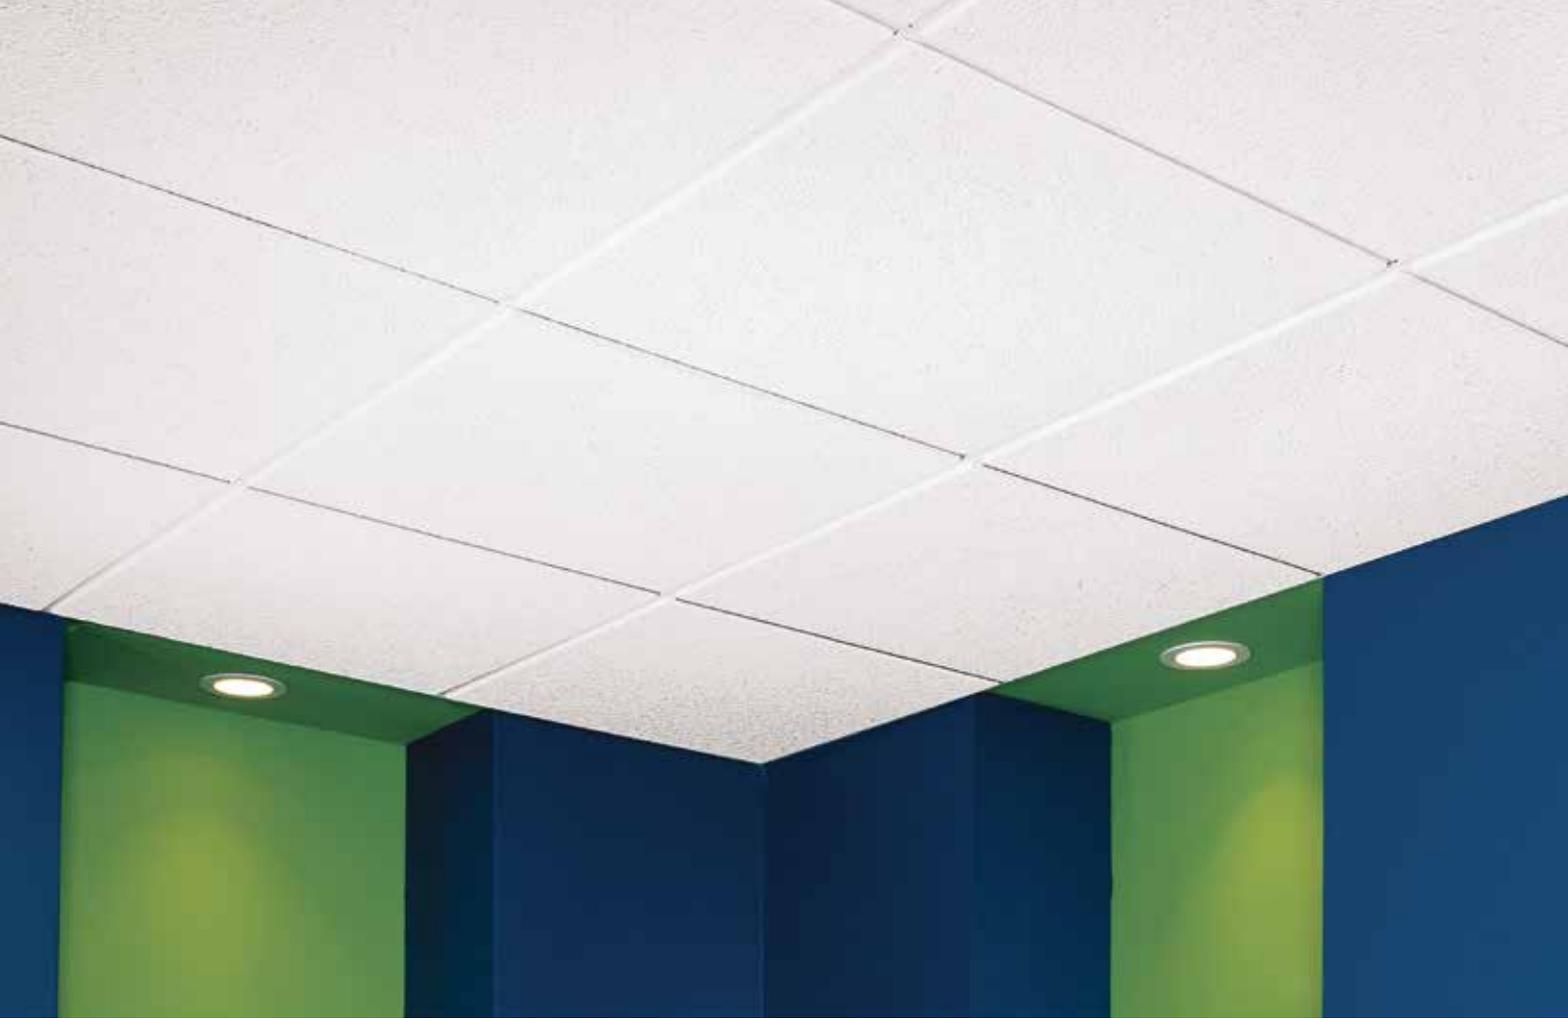

Cashmere® Narrow Reveal (White) (CM-450)

## ATTRIBUTES

	DIMENSIONS (INCHES)	EDGE DETAIL	UL CLASSIFIED NRC	CAC	EPD AVAILABLE	HPD AVAILABLE	SAG RESISTANT	MOLD RESISTANT	LR	WASHABLE	FIRE CLASS (ASTM E1264)	EMISSION COMPLIANT	RECYCLED CONTENT
<b>CASHMERE®</b>													
<b>CM-457</b>	24 x 24 x 3/4	Trim	0.60	35	Yes	Yes	Yes	BioShield	0.83	—	Class A	Certified	70%
<b>CM-454</b>	24 x 24 x 3/4	Reveal	0.60	35	Yes	Yes	Yes	BioShield	0.83	—	Class A	Certified	70%
<b>PCM-454</b>	24 x 24 x 3/4	Reveal	0.45	35	Yes	Yes	Yes	BioShield	0.83	—	Protectone*	Certified	45%
<b>CM-450</b>	24 x 24 x 3/4	Narrow Reveal	0.60	35	Yes	Yes	Yes	BioShield	0.83	—	Class A	Certified	70%
<b>PCM-450</b>	24 x 24 x 3/4	Narrow Reveal	0.45	35	Yes	Yes	Yes	BioShield	0.83	—	Protectone*	Certified	45%
<b>CM-497</b>	24 x 48 x 3/4	Trim	0.60	35	Yes	Yes	Yes	BioShield	0.83	—	Class A	Certified	70%
<b>CM-494</b>	24 x 48 x 3/4	Reveal	0.60	35	Yes	Yes	Yes	BioShield	0.83	—	Class A	Certified	70%
<b>CM-490</b>	24 x 48 x 3/4	Narrow Reveal	0.60	35	Yes	Yes	Yes	BioShield	0.83	—	Class A	Certified	70%

\* Protectone®: A fire-resistive ceiling when used in applicable UL assemblies.

**CAN'T FIND A SIZE?** Contact your local Sales Representative or call 800-233-8990

## PHYSICAL DATA

### MATERIAL

Mineral Fiber

### ASTM E1264 CLASSIFICATION

Type III, Form 2, Pattern E

### FIRE CLASS (ASTM E1264)

Tested according to ASTM E84 & CAN S102

Flame Spread: 25 or less

Smoke Developed: 50 or less

### VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

### MOLD/MILDEW RESISTANCE

BioShield® treatment included for added mold and mildew resistance.

### MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment.

### WARRANTY

10-year 104/90 Limited Warranty

### INSTALLATION CONSIDERATION

Colored ceilings are dye-lotted and should not be mixed.