

PERFORMA®

Cashmere® Customline®
 VOC Compliant

LOW
VOC

\$\$\$



LEED® v4

- MR: Environmental Product Declarations (EPDs)
- MR: Sourcing Raw Materials
- MR: Material Ingredients (HPDs)
- IEQ: Daylight
- IEQ: Low-Emitting Materials
- IEQ: Prereq. Min. Acoustic Performance (Schools)
- IEQ: Acoustic Performance
- MR: PBT Source Reduction (Healthcare)
- IEQ: Interior Lighting
- EA: Prereq. Min. Energy Performance
- EA: Optimize Energy Performance
- Recycled Content
Pre: **70%** | Post: **0%**

TOOLS

Visit CertainTeed.com/Ceilings
 Download HPDs and EPDs
 LEED® Information / BIM Objects
 3-Part Specs / Data Pages




Carbon Footprint
Reduction
Rapidly Renewable
Resource Content
Recycled Content



EPD Available



HPD Available

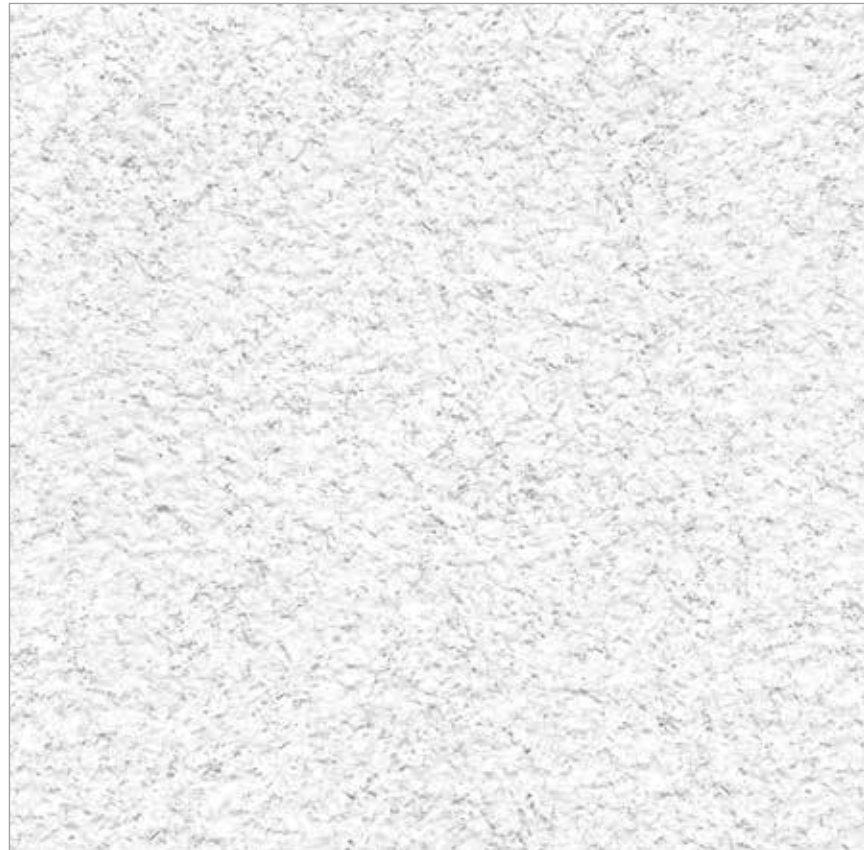


FEATURES & BENEFITS

- Upscale appearance
- Finely textured
- Clean, linear scoring
- Cuts cleanly, leading to quicker installation and lower installation costs
- Third-party verified Environmental Product Declaration (EPD) available for this product
- Health Product Declaration (HPD) available for this product


APPLICATIONS

- Offices
- Conference Rooms
- Healthcare
- Retail / Department Stores
- Hospitality Areas
- Other Commercial Buildings / Space Applications


AVAILABLE EDGE DETAILS



Reveal
Beveled
15/16 Grid




Narrow Reveal
Beveled
9/16 Grid




Narrow Reveal
Beveled
9/16 Grid Tier Drop


SCORING OPTIONS



24 x 48
224



24 x 48
448














24 x 48
812



Cashmere® Customline® Reveal (White) (CDS-448)

ATTRIBUTES

ATTRIBUTES													
DIMENSIONS (INCHES)	EDGE DETAIL	UL CLASSIFIED NRC	CAC	EPD AVAILABLE	HPD AVAILABLE	SAG RESISTANT	MOLD RESISTANT	LR	WASHABLE	FIRE CLASS (ASTM E1264)	EMISSION COMPLIANT	RECYCLED CONTENT	
CASHMERE® CUSTOMLINE®													
CDS-224	24 x 48 x 3/4	Reveal	0.60	35	Yes	Yes	—	BioShield	0.83	—	Class A	Certified	70%
CDSN-224	24 x 48 x 3/4	Narrow Reveal	0.60	35	Yes	Yes	—	BioShield	0.83	—	Class A	Certified	70%
CDS-448	24 x 48 x 3/4	Reveal	0.60	35	Yes	Yes	—	BioShield	0.83	—	Class A	Certified	70%
CDS-812	24 x 48 x 3/4	Reveal	0.60	35	Yes	Yes	—	BioShield	0.83	—	Class A	Certified	70%
CDSN-812	24 x 48 x 3/4	Narrow Reveal	0.60	35	Yes	Yes	—	BioShield	0.83	—	Class A	Certified	70%

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

PHYSICAL DATA

MATERIAL
Mineral Fiber

ASTM E1264 CLASSIFICATION
Type III, Form 2, Pattern E K

FIRE CLASS (ASTM E1264)
Tested according to ASTM E84 & CAN S102
Flame Spread: 25 or less
Smoke Developed: 50 or less

VOC EMISSIONS
Independently certified compliant with California
Department of Public Health CDPH/EHLB/Standard
Method Version 1.1, 2010.

MOLD/MILDEW RESISTANCE
BioShield® treatment included for added mold and
mildew resistance.

MAINTENANCE
Wipe with a soft cloth or vacuum with brush attachment.

WARRANTY
1-year Limited Warranty

INSTALLATION CONSIDERATION
Colored ceilings are dye-lotted and should not be mixed.