

PERFORMA®

Cashmere® High NRC **VOC Compliant**







LEED® v4

- MR: Environmental Product Declarations (EPDs)
- MR: Sourcing Raw Materials
- MR: Material Ingredients
- IEQ: Daylight
- IEQ: Low-Emitting Materials
- IEQ: Prereq. Min. Acoustic Performance (Schools)
- IEQ: Acoustic Performance
- MR: PBT Source Reduction (Healthcare)
- IEQ: Interior Lighting
- EA: Prereq. Min. Energy Performance
- EA: Optimize Energy Performance
- Recycled Content 70% | Post: 0%

TOOLS

Visit CertainTeed.com/Ceilings Download HPDs and EPDs LEED® Information / BIM Objects 3-Part Specs / Data Pages



Carbon Footprint Reduction Rapidly Renewable Recycled Content



EPD Available





FEATURES & BENEFITS

- Upscale appearance
- Cuts cleanly, leading to quicker installation and lower installation costs
- Certified VOC complaint
- Excellent sound absorption
- Third-party verified Environmental Product Declaration (EPD) available for this product
- Health Product Declaration (HPD) available for this product

APPLICATIONS

- Offices
- Conference Centers
- Healthcare Areas
- Hospitality Resorts
- Retail / Department Stores
- Other Commercial Buildings / Space Applications

AVAILABLE EDGE DETAILS












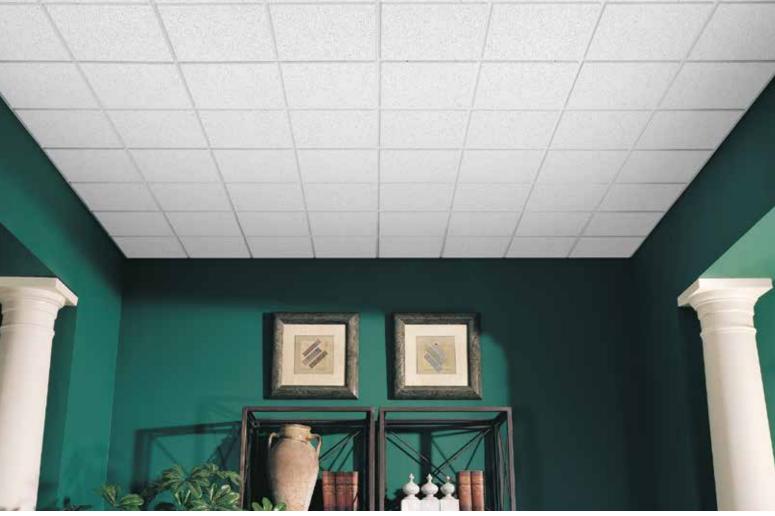

Cashmere® High NRC Reveal (CM-454NRCP)

ATTRIBUTES			*	<u> (()</u>	EPD	HPD	1	1	-		*	LOW	3
	DIMENSIONS (INCHES)	EDGE DETAIL		SSIFIED	EPD AVAILABLE	HPD AVAILABLE	SAG RESISTANT	MOLD RESISTANT	LR	WASHABLE	FIRE CLASS (ASTM E1264)	EMISSION COMPLIANT	RECYCLED CONTENT
CASHMERE* HIGH NRC													
CM-457NRCP	24 x 24 x 3/4	Trim	0.70	30	Yes	Yes	Yes	BioShield	0.82	_	Class A	Certified	70%
CM-454NRCP	24 x 24 x 3/4	Reveal	0.70	30	Yes	Yes	Yes	BioShield	0.82	_	Class A	Certified	70%
CM-450NRCP	24 x 24 x 3/4	Narrow Reveal	0.70	30	Yes	Yes	Yes	BioShield	0.82	_	Class A	Certified	70%
CM-497NRCP	24 × 48 × 3/4	Trim	0.70	32	Yes	Yes	Yes	BioShield	0.82	_	Class A	Certified	70%
CM-494NRCP	24 × 48 × 3/4	Reveal	0.70	32	Yes	Yes	Yes	BioShield	0.82	_	Class A	Certified	70%

CAN'T FIND A SIZE? Contact your local Sales Representative or call 800-233-8990

PHYSICAL DATA

MATERIAL

ASTM E1264 CLASSIFICATION

Type III, Form 2, Pattern C E

FIRE CLASS (ASTM E1264)
Tested according to ASTM E84 & CAN S102 Flame Spread: 25 or less Smoke Developed: 50 or less

VOC EMISSIONS

Independently certified compliant with California Department of Public Health CDPH/EHLB/Standard Method Version 1.1, 2010.

MOLD/MILDEW RESISTANCE

BioShield® treatment included for added mold and mildew resistance.

MAINTENANCE

Wipe with a soft cloth or vacuum with brush attachment.

10-year 104/90 Limited Warranty

INSTALLATION CONSIDERATION

Colored ceilings are dye-lotted and should not be mixed.

