


TRIM-TEX

Why use Caulk Channel Tear Away?

- Features a tear-off strip that acts as a guide for the taping knife as well as a protective mask from mud and paint
- Made from rust proof, dent resistant PVC to reduce jobsite waste
- Produced from at least 70% recycled material

Caulk Channel Tear Away

- Creates a $\frac{1}{4}$ " x $\frac{3}{16}$ " caulk channel when installed against a substrate such as a concrete wall
- Can also be used to cover expansion joints filled with fire or acoustical caulk
- To be used with $\frac{5}{8}$ " drywall

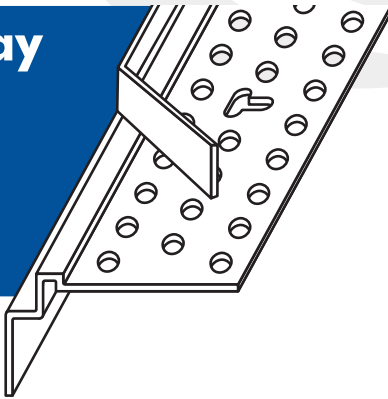

STOCK NO.	LENGTH	PCS. PER BOX
9140	10'	40

INSTALLATION

INSTALL WITH SPRAY ADHESIVES & STAPLES - NO - NAILS OR SCREWS

1. Cut and dry-fit the bead to length.
2. Spray the bead and then the drywall with Trim-Tex 847 Spray Adhesive. Immediately apply to the drywall.
3. Once in position, press the legs into place using the free installation tool or handle of your taping knife.
4. Staple both legs every 6"-8" with $\frac{1}{2}$ " long divergent staples.
5. Finish with drywall compound. To boost the performance and strength of your drywall compound, use Trim-Tex's high performance MUD-MAX drywall compound additive.
6. Remove tear-off strip to leave a clean finished edge.
7. Fill caulk channel after the bead has been installed & finished.

