
USG HALCYON™ CANOPIES

CLIMAPLUS™ PERFORMANCE

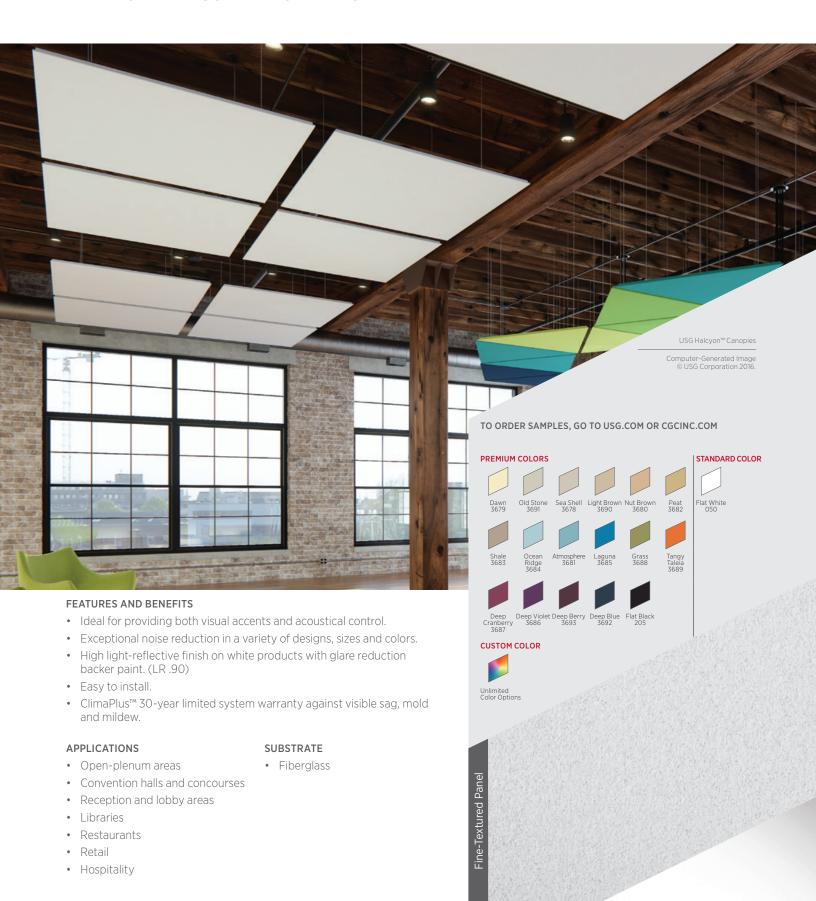

USG HALCYON CANOPIES

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE

USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative


FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG,4YOU (874-4968)





SIZES AND **CONFIGURATIONS**

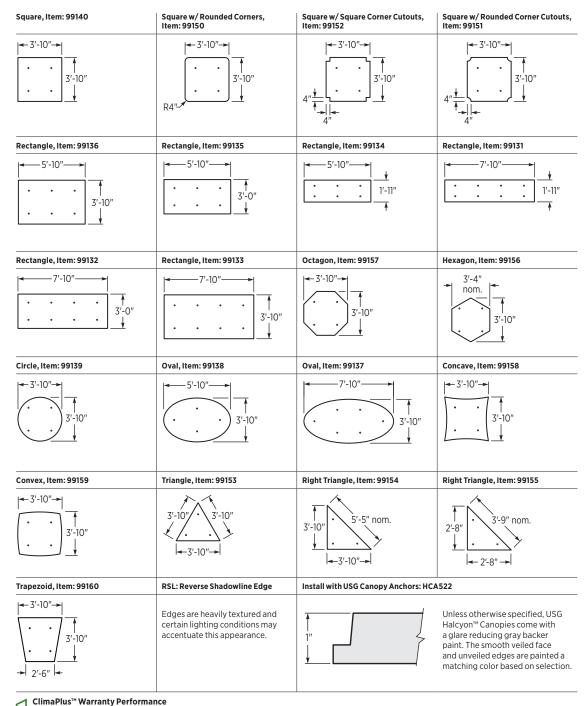

PHYSICAL DATA **FOOTNOTES**

Notice

The information in this document is subject to change without notice. CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

SC2797/3-17

© 2017 USG Corporation and/or its affiliates. All rights reserved. Printed in U.S.A.

Fiberglass substrate is inherently resistant to the growth of mold and mildew. Includes sag-resistance performance.

Data sheet: SC2797

ASTM E1264 classification

Type XII, Form 2, Pattern E & G

Weight 0.47 lb./sq. ft. (1" panels)

Recycled Content: 40%

ASTM E84 and CAN/ULC S102 surface-burning characteristics Class A

Flame spread: 25 or less Smoke developed: 50 or less

usgdesignstudio.com or

cgcdesignstudio.com

Thermal resistance R-4.4 (1" panels) Maintenance

Can be cleaned easily with a soft brush or vacuum. To clean panel, use a clean, white cloth with water or a mild detergent and wipe surface.

Seismic applications Refer to Seismic Technical Guide, Specialty Decorative Ceilings (SC2494) for more information on architectural components.

- USG Halcyon™ Canopies are flat, however will exhibit an inherent deflection, which may be more apparent as the proximity to adjacent surfaces is reduced. This deflection should be no more than 1/8". However local environmental conditions may increase this variance.
- Care should be taken to minimize movement due to air flow within a space.
- USG Halcyon™ Canopy Anchors (HCA522) are included with each panel. Dots represent anchor points.
- Hanger wire (12 ga) or clear acrylic rod (max 1/8" diameter) to be used as horizontal spacer when
- Panels must be ordered in multiples of two.
- Custom size, shape and color options are available. Consult your USG sales associate.
- Acoustical Performance: 1.20 Sabins per square foot (white).
- Do not backload.

Manufactured by USG Interiors, LLC 550 West Adams Street Chicago, IL 60661

The trademarks USG, CGC, CLIMAPLUS, HALCYON, IT'S YOUR WORLD. BUILD IT., the USG/CGC logo, the design elements and colors, and related marks are trademarks of USG Corporation or its affiliates.

Safety First! Follow good safety/industrial hygiene practices during installation. Wear appropriate personal protective equipment. Read SDS and literature before specification and installation.

