



SUBMITTAL SHEET

Product(s): Trim-Tex L.E.D. Light Bead

Description: Trim-Tex L.E.D. Bead installs directly to the drywall and features an angled leg that allows an L.E.D. strip to be installed at the optimal light angle.

Advantages: Accommodates a low profile 3/8" wide L.E.D. Strip (Sold Separately). Made from rust proof, dent resistant PVC to reduce jobsite and handling damage. Does not contain cellulose, a potential food source for mold

Limitations: Product is designed for interior use.

Applicable Standards: Rigid PVC products made by Trim-Tex meet ASTM specifications D3678-97, D1784-03, C1047-99 and achieve a Class A rating for flame spread and smoke developed when tested under ASTM E84-10.

Surface Characteristics: Trim-Tex products are made from PVC. PVC does not support combustion and is self extinguishing when the source of flame or heat is removed.



Installation:

Dry fit and cut the L.E.D. Light Bead to length. The L.E.D. Light Bead has a 5/8" return leg so it will not work with 1/2" Drywall. Spray the bead and drywall with Trim-Tex 847 Spray Adhesive & immediately apply to the drywall. Once in position, press the leg into place using the Trim-Tex installation tool or handle of your taping knife. Staple the mud leg every 6"-8" with 1/2" long divergent staples. Finish the installation by mudding and sanding the bead.

Finishing: Always use a high quality paint.

Accessories: 847 Spray Adhesive, Staple Guns and Divergent Staples, Trim-Tex Sanding Blocks & Abrasive Products, Mud-Max Drywall Compound Additive, North by Honeywell -Safety Products distributed by Trim-Tex.

TYPICAL APPLICATIONS

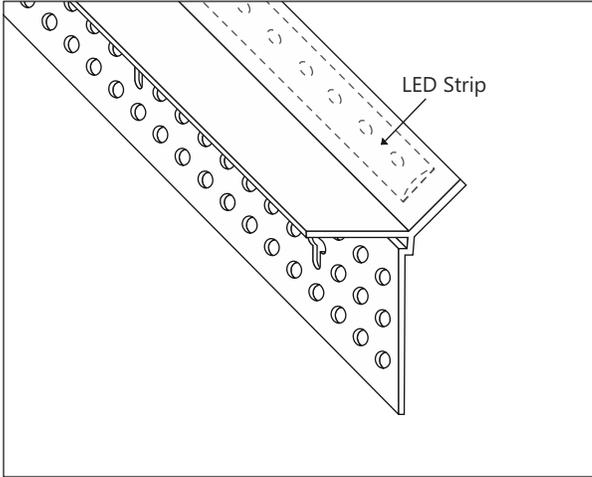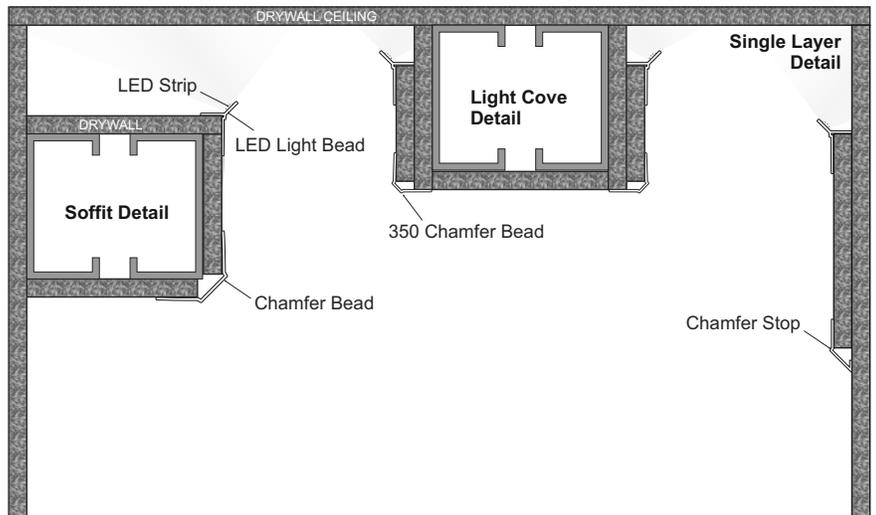

STOCK NUMBER	LENGTH	PCS PER BOX
LED10	10'	20

Job Name _____

Contractor _____

Date _____

Approvals (Signatures or Stamps)