
# **USG PEBBLED™ ACOUSTICAL PANELS**

CLIMAPLUS™ PERFORMANCE

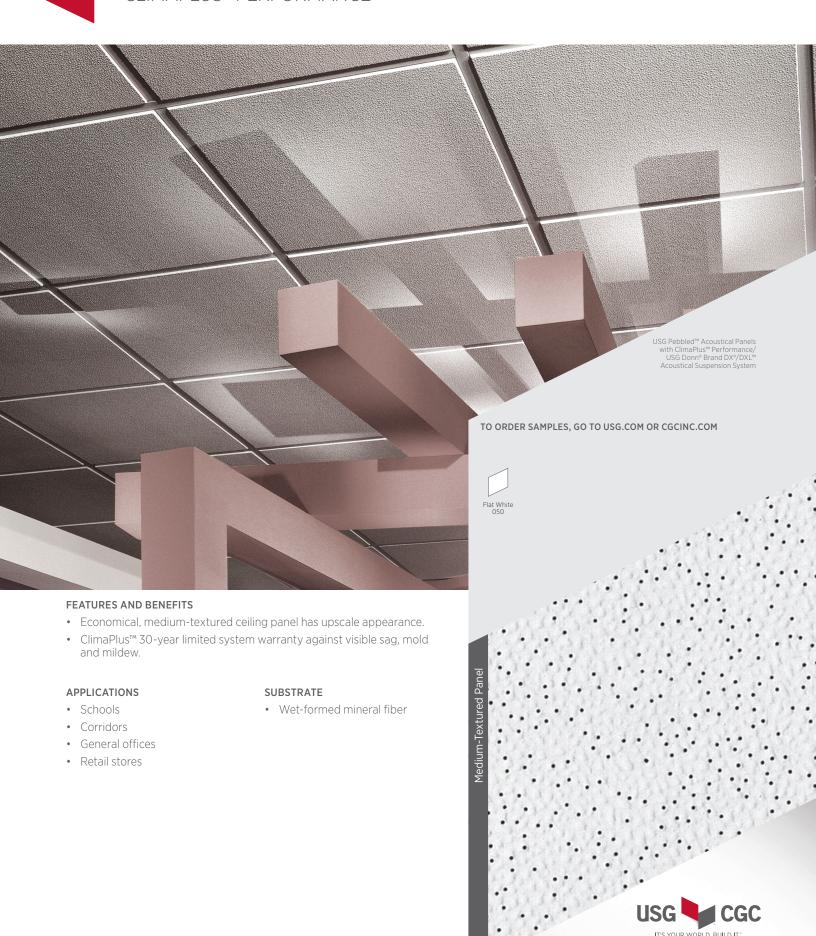

# **USG PEBBLED™ ACOUSTICAL PANELS**

CLIMAPLUS™ PERFORMANCE

ORDER SAMPLES/LITERATURE USG: samplit@usg.com fax: 888 874-2348 | usg.com CGC: contact Sales Representative

FOR MOST UP-TO-DATE **TECHNICAL INFORMATION** AND LEED REPORT TOOL usgdesignstudio.com cgcdesignstudio.com

TECHNICAL SERVICES 800 USG.4YOU (874-4968)



PRODUCT CERTIFIED FOR LOW CHEMICAL EMISSIONS: UL.COM/GG UL 2818

**USG PEBBLED™ PANELS** 



(ĥ	UL	Classified
----	----	------------

Edge	Panel Size	Fire Rating	Item No.	NRC	CAC Min.	LR <sup>2</sup>	Color	Grid Options	VOC Emissions	Anti-Mold & Mildew	Recycled Content <sup>1</sup>	Panel Cost
				NRC	CAC	Ø		ø	Ø	Ø	Ø.	\$
SQ	2'x2'x5/8"	Class A	4801	0.55	35	0.86	White	A,B,C	Low		44%	\$\$
	2'x4'x5/8"	Class A	4800	0.55	35	0.86	White	A,B	Low		44%	\$\$
SLT	2'x2'x5/8"	Class A	4805	0.55	35	0.86	White	D	Low		44%	\$\$
FLB	2'x2'x5/8"	Class A	4867	0.55	35	0.86	White	E,F,G,H	Low		44%	\$\$

Low Emissions (VOC)
Third party (GREENGUARD Gold) certified for low-emitting performance, meets
California Department of Public Health's (CDPH) Standard Method v1.1 - 2010 (CA Section 01350). 'Certificates of Compliance' for Low VOC Emissions are available on usg.com and at productguide.ulenvironment.com.

USG Centricitee

ClimaPlus™ Warranty Performance<sup>3</sup>

Contains a broad-spectrum antimicrobial additive on the face and back of the panel that provides resistance against the growth of mold and mildew. Includes sag-resistance performance.

USG Fineline®

1/8 DXFF™

USG Identitee\*

DXI™

# **GRID PROFILE OPTIONS**



Product literature Data sheet: SC1836

USG DX\*/DXL™

ASTM E1264 classification

Type III, Form 2, Pattern CE

ASTM E84 and CAN/ULC S102

surface-burning characteristics Class A Flame spread: 25 or less Smoke developed: 50 or less

**Weight** 0.70-0.79 lb./sq. ft.

#### Online tools

USG DXW™

usgdesignstudio.com or cgcdesignstudio.com

Thermal resistance R-1.4

Maximum backloading

See USG 30-Year Limited System Warranty Commercial Applications (SC2102).

### Maintenance

Can be cleaned easily with a soft brush or

#### Metric sizes available

Contact sales for minimum quantities and lead times.

USG DX\*/DXL™

1. For details, see LEED report tool at usgdesignstudio.com or cgcdesignstudio.com.

USG Fineline

DXF™

2. LR values are shown as averages.

USG Centricitee

- 3. For details, see USG 30-Year Limited System Warranty Commercial Applications (SC2102) and ClimaPlus™ Ceilings Certification of Performance (SC2451).
- 4. Maximum 2'x2' with SQ edge panels.

# Notice

Notice
The information in this document is subject to change without notice.
CGC Inc. or USG Corp. assumes no responsibility for any errors that may inadvertently appear in this document.

