




## Easy application. Reliable. Low Cost Performance.

QuietSeal® Pro is a high performing, non-hardening acoustical sealant used to maintain optimum acoustic performance of the Quiet® Sound Damping System. QuietSeal® Pro stays soft to prevent cracking and reduce sound transmission. Apply QuietSeal® Pro around perimeters of the walls to prevent noise leaks in your assembly. It's easy to use and offers a hassle free clean up – just use soap and water. Choose QuietSeal® Pro for quick application, maximum performance, and reliable results when used as part of the Quiet® Sound Damping System.

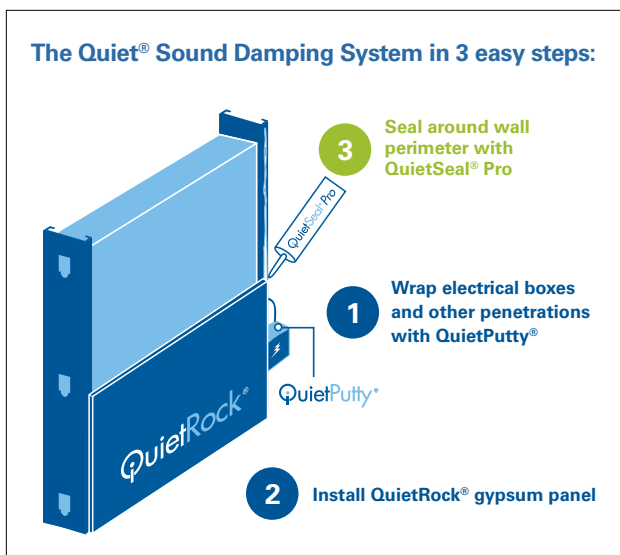

Visit [www.QuietRock.com](http://www.QuietRock.com) for installation instructions and complete architectural documentation.

### QuietSeal® Pro Benefits:

- Optimizes damping performance of STC rated assemblies
- Easy application
- Hassle free clean up
- Stays soft for high acoustic performance
- Environmentally friendly: water-based, low VOC and low odor
- Exceeds ASTM C 834 standards

### Product Specifications:

<b>Model:</b>	QuietSeal® Pro
<b>Color:</b>	Light Blue
<b>Coverage:</b>	88 linear feet for 1/4" bead
<b>Weight:</b>	3 lbs/tube
<b>Storage temp:</b>	40°-100°F
<b>Volume shrinkage:</b>	18.4%
<b>VOC:</b>	< 0.1 g/l voc

The information contained in this document is for general purposes only. Features and specifications are subject to change. Construction practices have an influence on final STC ratings. PABCO® Gypsum cannot guarantee actual STC ratings. Flanking sound patterns, the integrity of the wall, and construction methods factor in effective sound control. QuietSeal® Pro should be stored flat in a dry area to prevent damage to product.